

NOTES:

1. HOUSING: LCP, UL 94V-0, COLOR- BLUE (PANTONE 300C) OR BLACK
2. BOTTOM COVER: LCP, UL 94V-0, COLOR- BLUE (PANTONE 300C) OR BLACK
3. CONTACT: USB3 C2680-H T=0.25mm ; USB2 C5191-H T=0.25mm
30 μ " MIN. GOLDPLATED ON CONTACT AREA, 120 μ " MIN. MATTE TIN PLATED ON SOLDERING TAIL, 80 μ " MIN. NICKEL UNDER-PLATED OVERALL
4. FRONT SHELL: SUS304-1/2H, T=0.25mm, 30 μ " MIN. NICKEL PLATED OVER ALL, 100 μ " MIN. MATTE TIN PLATED ON SOLDERING TAIL,
5. MIDDLE SHELL: SUS304-1/2H, T=0.25mm,
6. REAR SHELL: SUS304-1/2H, T=0.20mm,
7. THIS PRODUCT DOESN'T CONTAIN ENVIRONMENTAL HAZARDOUS PER DIRECTIVE 2011/65/EU FOR RoHS COMPLIANT. OR PER IEC 61249-2-21 FOR HALOGEN-FREE COMPLIANT.

设计:	Arvin: 2016.03.08	范围 Range	公差 Tolerance
审核:	Arvin:	X.X \pm	X.X ± 0.30
校对:	Ru yi:	X.XX \pm	X.XX ± 0.20
比例:	视角关系: $\odot \triangleleft$	X.XXX \pm	X.XXX ± 0.10
版次:	图框大小: A4	Angle \pm	Angle $\pm 5^\circ$


东莞市恒祺电子科技有限公司

名称: TYPE-C 料号:

形号: 16PIN双层

共 张 , 第 张

备注:

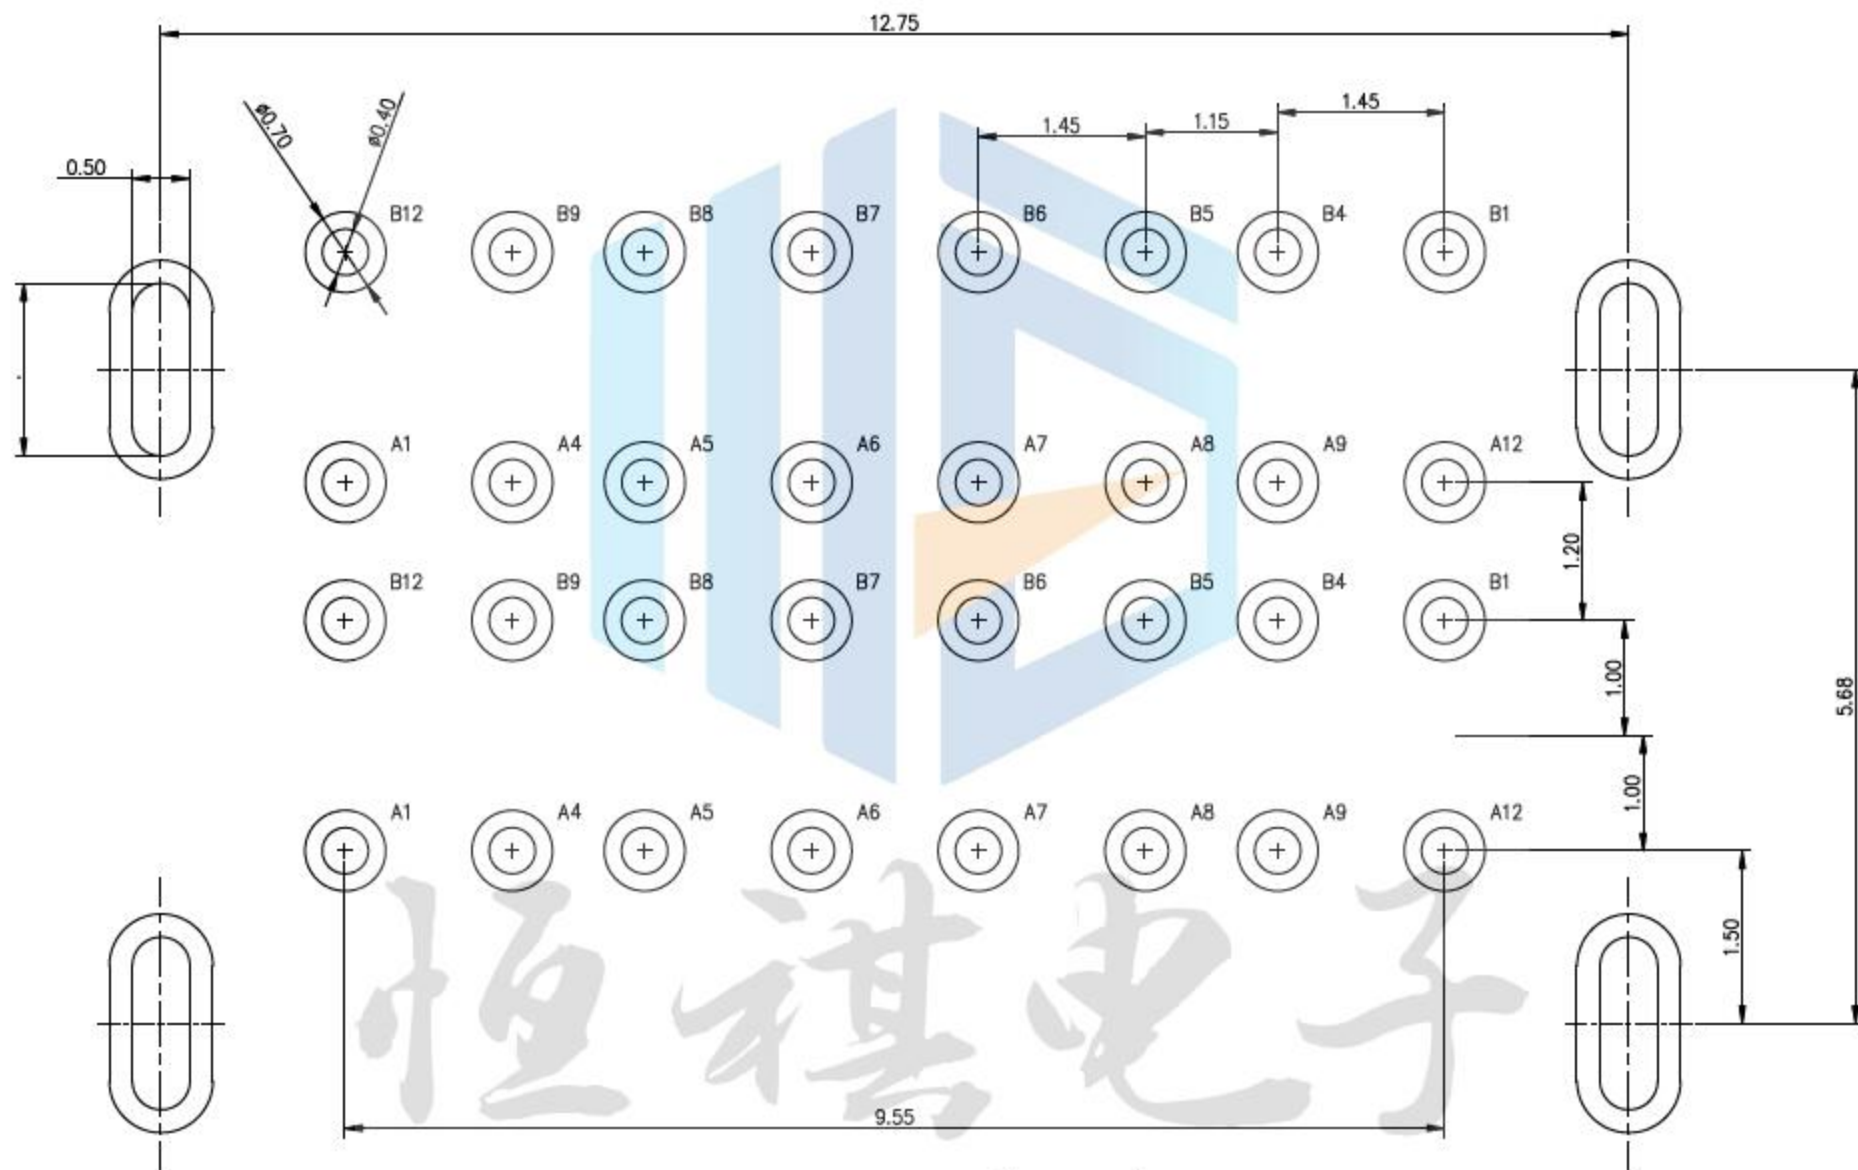

RECOMMENDED PCB LAYOUT(TOP VIEW)

(DEFAULT TOLERANCE: ±0.05)

设计:	Arvin: 2016.03.08	范围 Range	公差 Tolerance	东莞市恒祺电子科技有限公司	
审核:	Arvin:	X.X ±	X.X ±0.30		
校对:	Ru yi:	X.XX ±	X.XX ±0.20	名称:TYPE-C	料号:
比例:	视角关系:	X.XXX ±	X.XXX ±0.10	形号: 16PIN双层	
版次:	图框大小: A4	Angle ±	Angle ±5°	共 张 , 第 张	备注: