
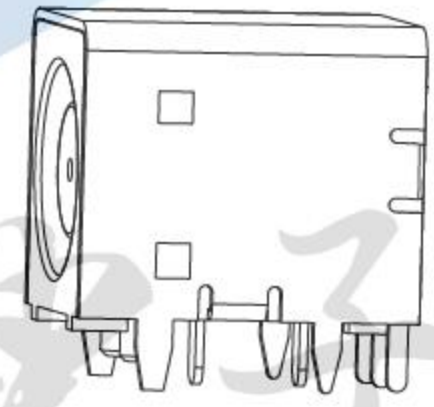
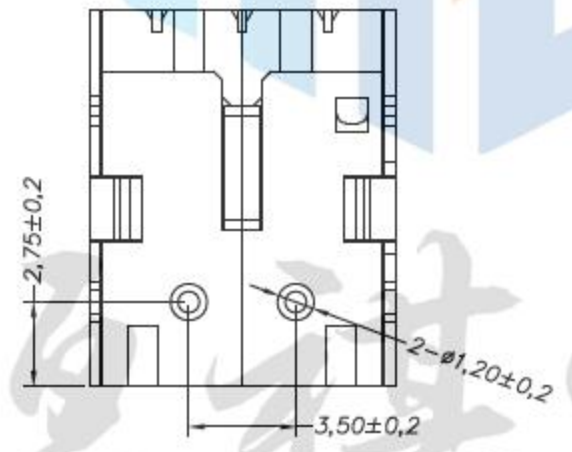


P. C. B LAYOUT TOP VIEW

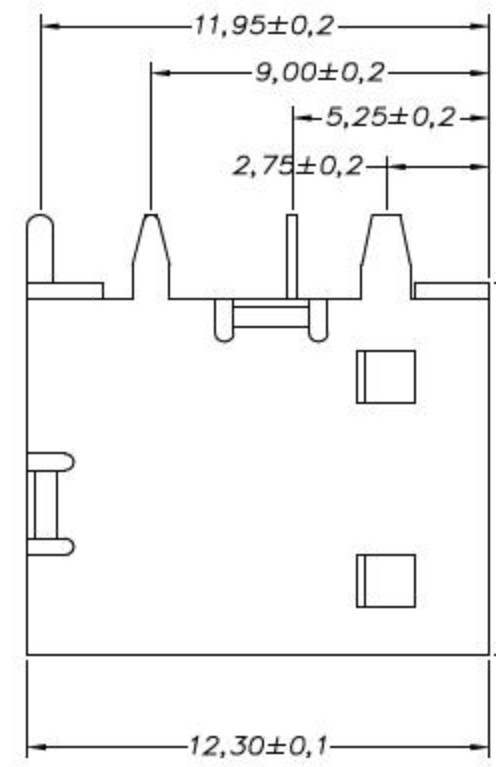

主要技术性能	公差
额定电负荷	DC 30V\3.0A X.±0.20
接触电阻	≤0.03Ω . X±0.10
绝缘电阻	≥100MΩ . XX±0.05
耐压	AC500V(50Hz)/min . XXX±0.02
插拔力	3-20N X°±5°
使用温度范围	-30-70℃ . X°±2°
使用寿命	5000次 . XX±1°

设计:	Arvin: 2016.03.08	范围 Range	公差 Tolerance
审核:	Arvin:	X.X ±	X.X ±0.30
校对:	Ru yi:	X.XX ±	X.XX ±0.20
比例:	视角关系:	X.XXX ±	X.XXX ±0.10
版次:	图框大小: A4	Angle ±	Angle ±5°

东莞市恒祺电子科技有限公司

名称: DC插座	型号: DC-109
料号:	
共 张 , 第 张	备注: